

## TECHNICAL DATA SHEET

### TMTAL CACHE IP20 / Aga-Led® Type A

VERSION - 14.12.2015

#### STANDARD LUMINAIRE

Reference	TMTAL Cache
Protection Class	IP20
Lighting Source	Aga-Led® Type A
Connector	Festoon on B'Light conductor 16mm <sup>2</sup>
Dimensions	104 x 50mm
Lenght on measure	on request up to 2990mm
Nb Lighting Unit	18 LED/m
Voltage	24V
Power	21.6 W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>
End Caps	EPR190



#### FINISH

##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome or Gold Aspect Plywood


#### ON REQUEST

Fixation	BASE + TIGE
End Caps	EPR - EPR190
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>


#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type A
Ref	A10
Voltage	24V
Power	1W
Beam Angle	15°
CRI	80
Color Temperature	lm/Unit
	2800K 40lm
	4000K 45lm
Lifetime	60'000h
Working T°	-30°C ~ +55°C

#### ON REQUEST - Anti Glare: AGC



#### TMTAL Cache / AGA-LED® TYPE A -Festoon

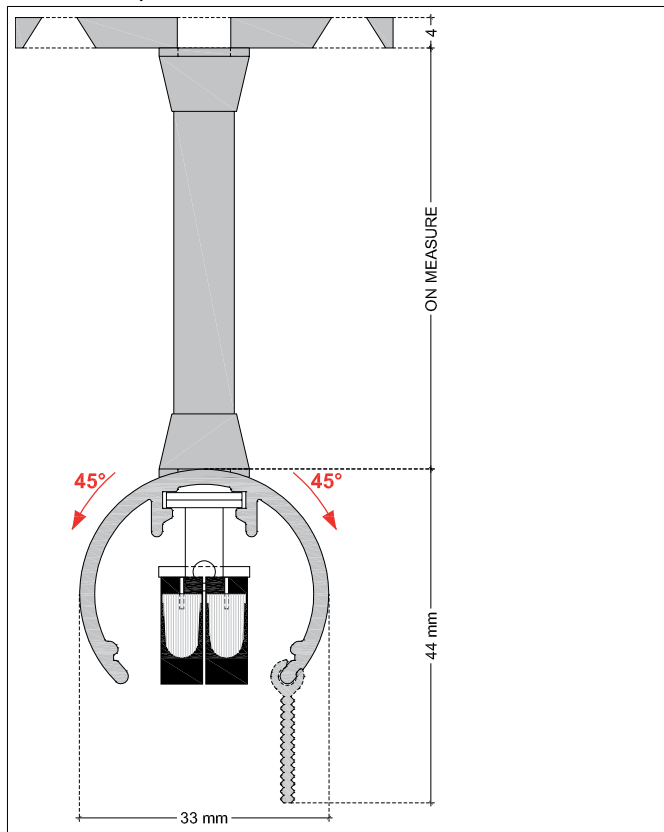

#### END CAPS

##### EPR190



#### CERTIFICAT



#### AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.aaabekov.com

