


TECHNICAL DATA SHEET

LU4SAL IP20 + ARLS Orientable Spot / Aga-Led® Type B

VERSION - 01.03.2016

STANDARD LUMINAIRE

Reference	LU4SAL + ARLS
Protection Class	IP20
Lighting Source 1	Aga-Led® BUR for ARLS
Lighting Source 2	Aga-Led® Type B
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	36 x 51mm
Length on measure	on request up to 3000mm
Voltage	24V
Power	1.2 W/Aga-Led® Type B - 1.8W/Aga-Led® BUR
Connecting Cable	1m standard cable 2x1.5mm ²
Cover	VRM: Opaline Glass

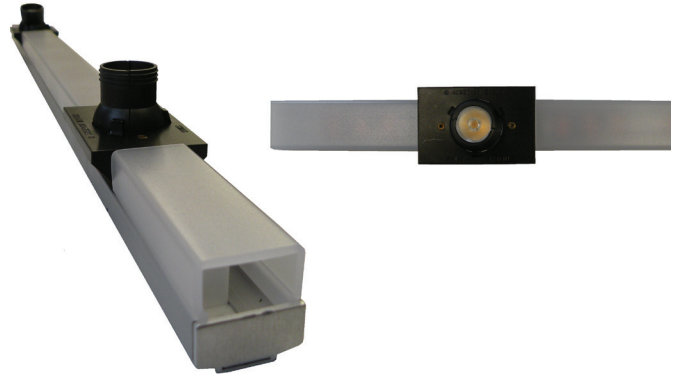

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome or Old Gold Aspect

ON REQUEST


Fixation	FCU (Width: +4mm)
End Caps	EU4
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source 1	Aga-Led® BUR for ARLS Spot			
Ref	BUR_14			
Voltage	24V (12V Dimmable)			
Power	1.8W			
Beam Angle	14°			
CRI	80			
Color Temperature	Im/Unit			
	2200K	67~74 lm		
	4000K	107~114 lm		
Lifetime	50'000h			
Working T°	-20°C ~ +40°C			



LU4SAL / Aga-Led® TYPE B + ARLS Spot with Aga-Led® BUR

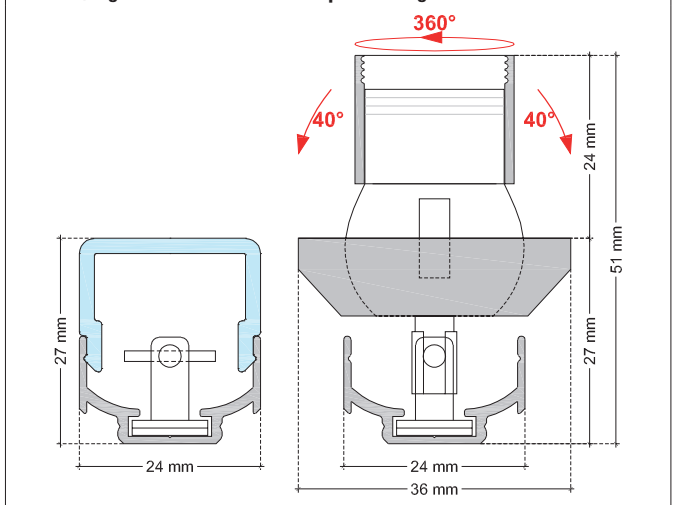

ON REQUEST: End Caps EU4



Lighting Source 2

	Aga-Led® Type B - Generation 2			
Ref	B2	B3	B4	B6
Voltage	24V	24V	24V	24V
Power	1.2W	0.96W	1.2W	1.2W
Beam Angle	120°	120°	120°	120°
CRI	80	80	80	80
Color Temperature	Im/Unit			
	2200K	44 ~ 74	- -	50 ~ 85
	2400K	48 ~ 81	58 ~ 97	55 ~ 93
	2800K	68 ~ 114	82 ~ 137	66 ~ 111
	4000K	68 ~ 114	82 ~ 137	66 ~ 111
Lifetime	50'000h			
Working T°	-20°C to +45°C			
Environmental protection	Modified acrylate resin			

CERTIFICAT



Multifunctional diffusion and spot light
all **1** in



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

