

TECHNICAL DATA SHEET

LU6R Pendant / Aga-Led® Type RGB

VERSION - 19.09.2017

STANDARD LUMINAIRE

Reference	LU6R
Protection Class	IP40
Lighting Source	Aga-Led® Type RGB
Connector	Festoon
Size - mm	36 x 59mm without fixture
Lenght on measure	210mm to 3000mm
Nb Lighting Source	17 LED/m
Voltage	24V
Power	40.8 W/m
Dimmable	Yes
Cover	VSM6 (Opaline Glass)
End Caps	ERPS-N
Fixture	number to be defined according the lenght Standard : 20cm height from ceiling to luminaire

APPLICATION : WALL, CEILING OR FLOOR



FINISH

Color Finishing Profil


Standard	Natural Anodised Aluminium
On request	Thermo-enameling Power Coating RAL Color Anodising Chromiun or Gold plating

ON REQUEST

Fixture	Number to defined - Height on measure
Connecting Plug	AMS / AF
Dimming Option	DMX, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type RGB
Ref	09LS05B G2
Voltage	24V
Current	Red: 20mA-Green: 40mA-Blue: 40mA
Power	2.4W
Beam Angle	120°
Light Output - mcd	Red: 750 mcd Green: 2100 mcd Blue: 450 mcd
Lifetime	50'000h
Working T°	-20°C to +45°C
Environmental protection	Modified acrylate resin

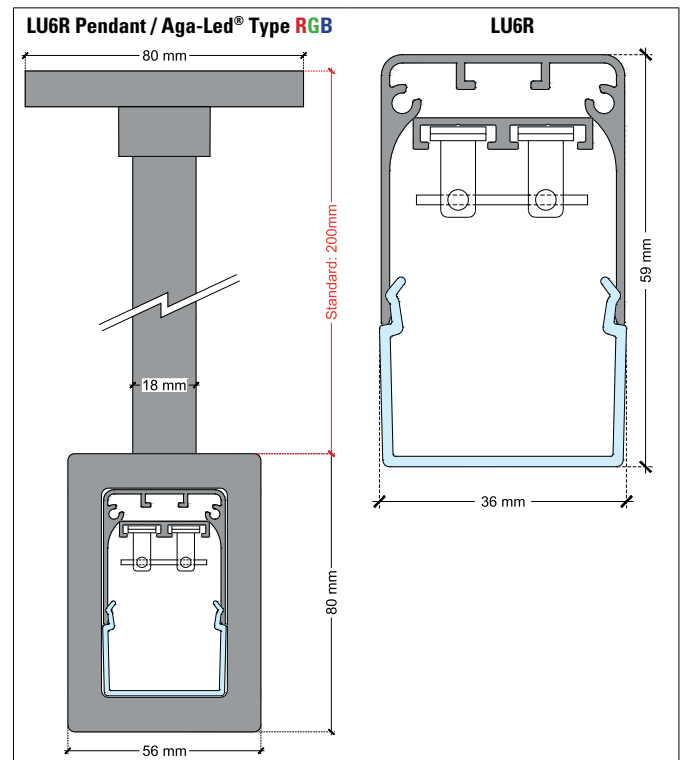

CERTIFICAT

